


ITEM	DESCRIPTION
1	DT12 D-STOP
2	DRIVE COUPLING, D-STOP
3	SOCKET COVER
4	ENGAGEMENT KEY

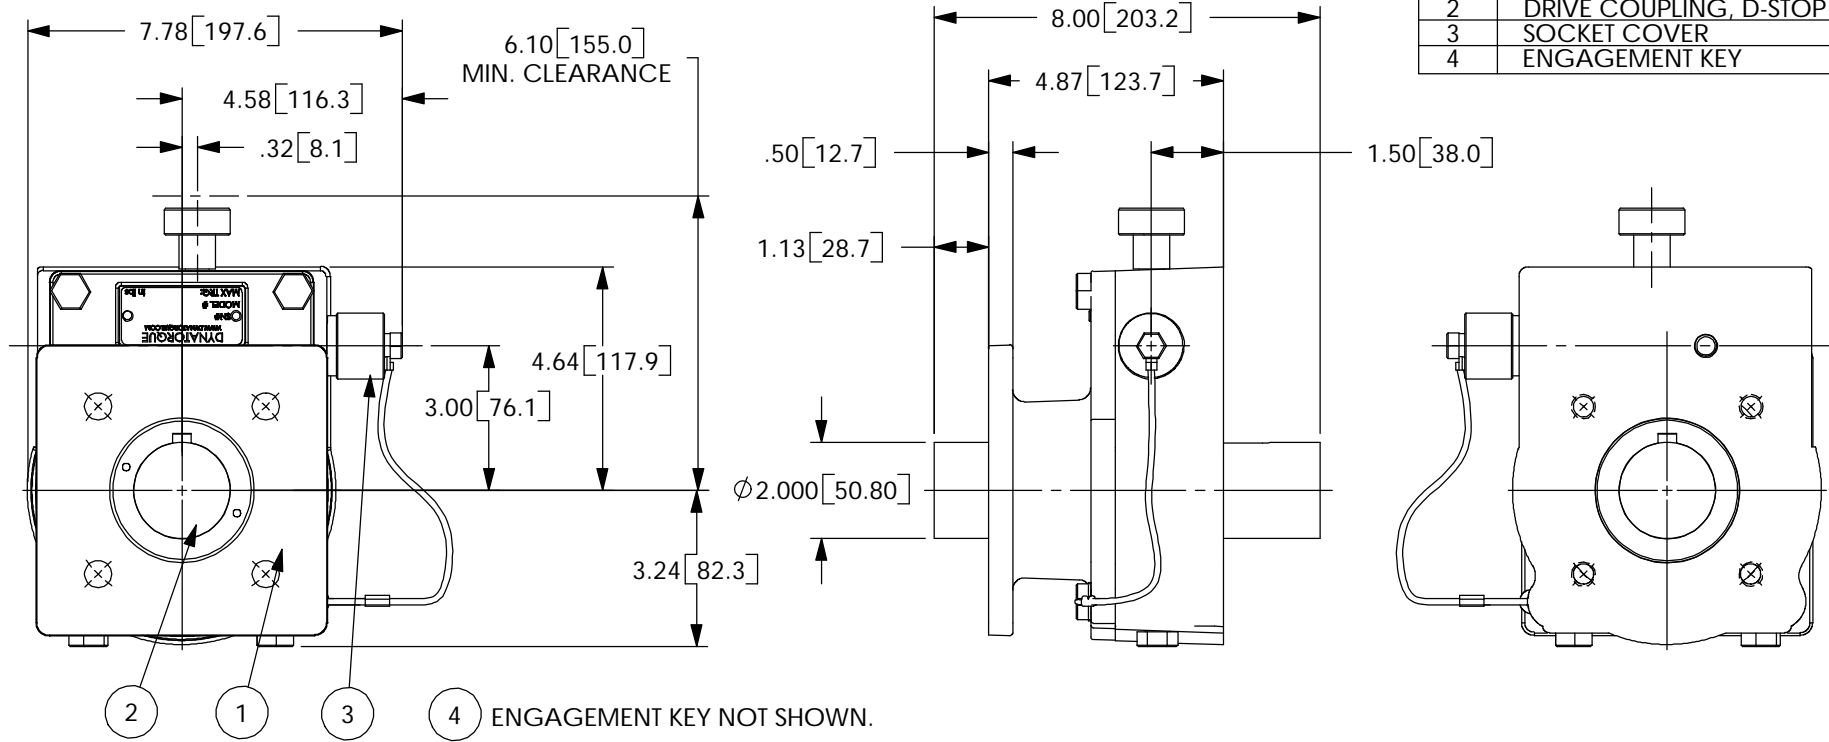

CONSULT FACTORY FOR SPECIAL CONFIGURATIONS

STANDARD 20° TEST POSITION. SHOWN IN HOME POSITION.
 GREASED FOR LIFE.
 STANDARD STAINLESS STEEL SHAFT.
 STANDARD STAINLESS STEEL ENGAGEMENT KEY.

MAX DRIVE COUPLING BORE & KEY

MAX IN LINE	MAX
Ø 1.250 .250 X .188 KEY	Ø 1.500 .375 X .250 KEY

CONSULT FACTORY FOR SPECIAL CONFIGURATIONS AND SWITCH MOUNTING OPTIONS

TORQUE: 16,000 IN LBS [1808 N-M]
 TEMPERATURE: -20° TO 150°F [-29° TO 66°C]
 WEIGHT
 UNIT: 30 LBS [13.6 KG]
 DRIVER: 7.0 LBS [3.2 KG]
 KEY: .9 LBS [.4 KG]

HOUSING MOUNTING PATTERN

COVER MOUNTING PATTERN

**PARTIAL STROKE TESTING UNIT
 COMMERCIAL GRADE**

MAX	MAX ON CENTER	STD	MIN	MAX	MAX ON CENTER	STD	MIN
Ø 6.500 3/4-10	Ø 5.250 1/2-13	Ø 4.921 1/2-13	Ø 3.750 3/8-16	Ø 6.500 Ø .812	Ø 5.375 Ø .688	Ø 4.921 Ø .562	Ø 4.750 Ø .562

DYNATORQUE
 1934 E. SHERMAN MUSKEGON, MI 49444-1824
 (231) 739-1377 FAX (231) 739-4514
 WWW.DYNATORQUE.COM

**DT12
 D-STOP**

50-28XX 8/12/03