


ITEM	DESCRIPTION
1	DT3 D-STOP
2	DRIVE COUPLING, D-STOP
3	SOCKET COVER
4	ENGAGEMENT KEY

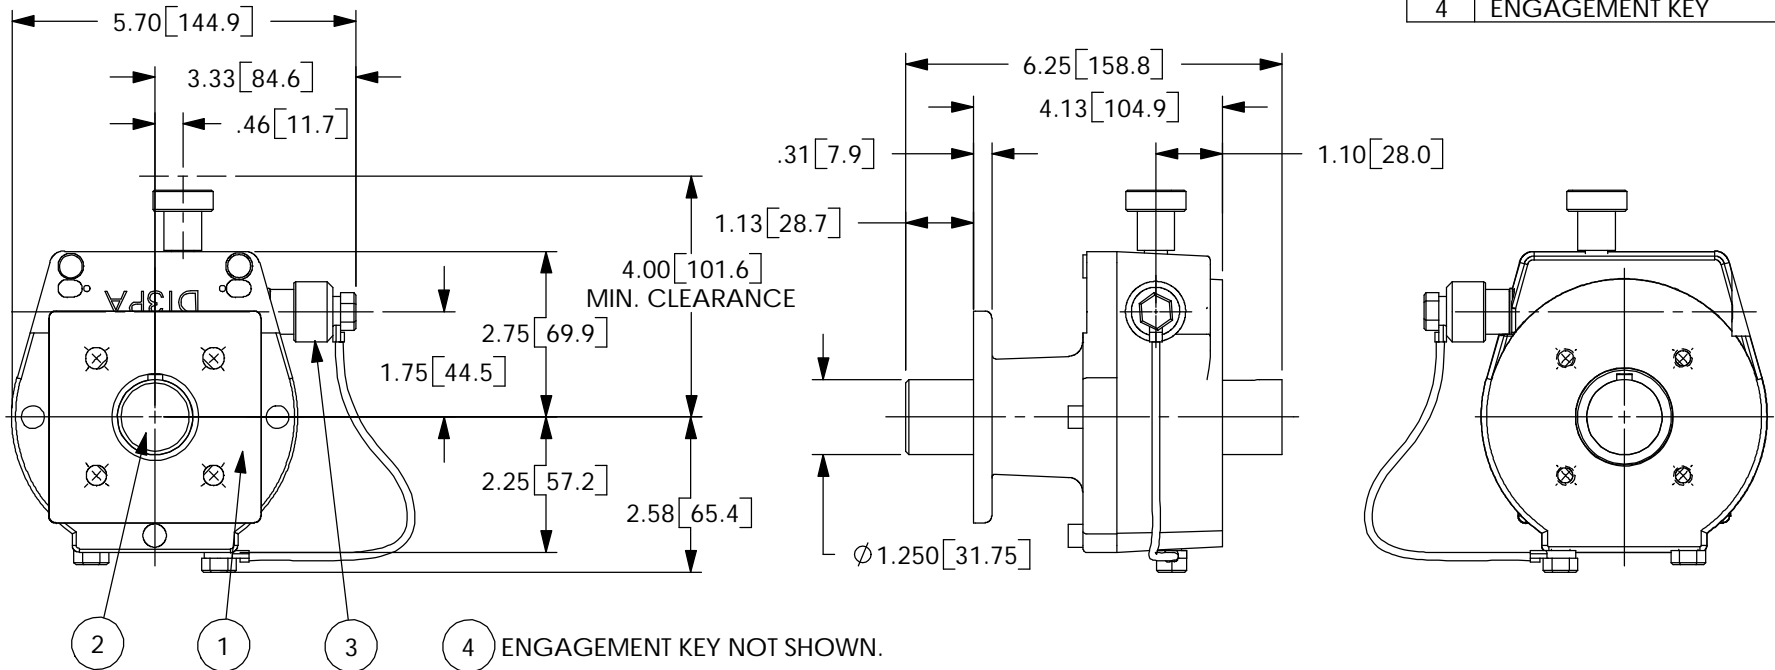

4 ENGAGEMENT KEY NOT SHOWN.

CONSULT FACTORY FOR SPECIAL CONFIGURATIONS.

STANDARD 20° TEST POSITION. SHOWN IN HOME POSITION. GREASED FOR LIFE. STANDARD STAINLESS STEEL SHAFT. STANDARD STAINLESS STEEL ENGAGEMENT KEY.				MAX DRIVE COUPLING BORE & KEY				CONSULT FACTORY FOR SPECIAL CONFIGURATIONS AND SWITCH MOUNTING OPTIONS		TORQUE: 4,500 IN LBS [509 N-M] TEMPERATURE: -20° TO 150°F [-29° TO 66°C] WEIGHT UNIT: 10 LBS [4.5 KGS] DRIVER: 2 LBS [.9 KG] KEY: .6 LBS [.3 KG]	
				Ø .750 .188 X .125 KEY		Ø .875 .250 X .188 KEY					
HOUSING MOUNTING PATTERN				COVER MOUNTING PATTERN				PARTIAL STROKE TESTING UNIT COMMERCIAL GRADE			
MAX	MAX ON CENTER	STD	MIN	MAX	MAX ON CENTER	STD	MIN	DYNATORQUE 1934 E. SHERMAN MUSKEGON, MI 49444-1824 (231) 739-1377 FAX (231) 739-4514 WWW.DYNATORQUE.COM			
Ø4.019 3/8-16	Ø3.750 3/8-16	Ø2.756 5/16-18	Ø1.968 1/4-20	Ø4.250 Ø.406	Ø3.125 Ø.344	Ø2.756 Ø.344	Ø2.756 Ø.344			DT3 D-STOP	

50-22XX 4/15/04