


CONSULT FACTORY FOR SPECIAL CONFIGURATIONS.

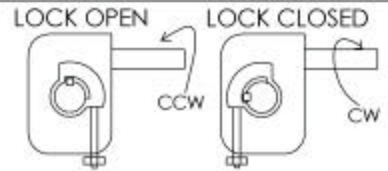

UNIT SHOWN IN OPEN POSITION.
 UNITS ARE AVAILABLE IN LOCK CLOSED OR LOCK OPEN, UNIT SHOWN IS LOCK CLOSED.
 GREASED FOR LIFE.

| MAX DRIVER BORE & KEY | |
|-------------------------------|-------------------------------|
| MAX IN LINE | MAX |
| Ø 1.500 .375 X .250 KEY | Ø 1.875 .500 X .375 KEY |

3/4" HEX DRIVE FOR INPUT SHAFT
 PADLOCK: 1/4" SHANK OR SMALLER
 APPROXIMATE TURNS FOR ENGAGEMENT: 11

TORQUE: 21,000 IN LBS [2373 N-M]
 TEMPERATURE: -20° TO 150°F [-29° TO 66°C]
 WEIGHT UNIT: 42 LBS [19.0 KG]
 DRIVER: 13 LBS [5.9 KG]

| HOUSING MOUNTING PATTERN | | | | COVER MOUNTING PATTERN | | | | COMMERCIAL GRADE D-LOCK | |
|--------------------------|-------------------|-------------------|-------------------|------------------------|-------------------|-------------------|-------------------|---|--------------------|
| MAX | MAX ON CENTER | STD | MIN | MAX | MAX ON CENTER | STD | MIN | DYNATORQUE WWW.DYNATORQUE.COM | DT21 D-LOCK |
| Ø 7.000 3/4-10 | Ø 5.625 3/8-16 | Ø 5.512 5/8-11 | Ø 4.500 5/8-11 | Ø 7.750 Ø .812 | Ø 5.813 Ø .688 | Ø 5.510 Ø .688 | Ø 5.500 Ø .562 | | |