


CONSULT FACTORY FOR SPECIAL CONFIGURATIONS.

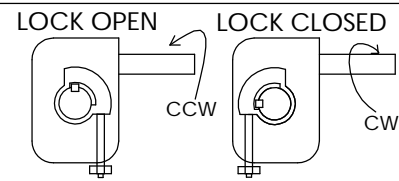

UNIT SHOWN IN OPEN POSITION.
 UNITS ARE AVAILABLE IN LOCK CLOSED OR LOCK OPEN, UNIT SHOWN IS LOCK CLOSED.
 GREASED FOR LIFE.

MAX DRIVER BORE & KEY	
MAX IN LINE Ø 5.000 1.000 X .750 KEY	MAX Ø 5.250 1.500 X 1.000 KEY

3/4" HEX DRIVE FOR INPUT SHAFT
 PADLOCK: 1/4" SHANK OR SMALLER
 APPROXIMATE TURNS FOR ENGAGEMENT: 25

TORQUE: 260,000 IN LBS [29376 N-M]
 TEMPERATURE: -20° TO 150°F [-29° TO 66°C]
 WEIGHT UNIT: 441 LBS [200.0 KG]
 DRIVER: 231 LBS [104.8 KG]

HOUSING MOUNTING PATTERN

COVER MOUNTING PATTERN

COMMERCIAL GRADE D-LOCK

MAX	MAX ON CENTER	STD	MIN	MAX	MAX ON CENTER	STD	MIN
Ø 15.500 1-8 UNC	Ø 15.500 1-8 UNC	Ø 14.016 1 1/8-7 UNC	Ø 10.000 5/8-11 UNC	Ø 15.000 Ø 1.188	Ø 15.000 Ø 1.188	Ø 14.016 Ø 1.188	Ø 12.450 Ø .688

DYNATORQUE
 WWW.DYNATORQUE.COM

**DT260
 D-LOCK**

54-51XX 3/21/07