


CONSULT FACTORY FOR SPECIAL CONFIGURATIONS.

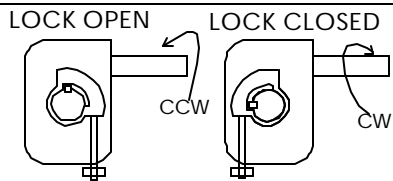

UNIT SHOWN IN OPEN POSITION.
 UNITS ARE AVAILABLE IN LOCK CLOSED OR LOCK OPEN, UNIT SHOWN IS LOCK CLOSED.
 GREASED FOR LIFE.

MAX DRIVER BORE & KEY	
MAX IN LINE	MAX
Ø 2.125 .500 X .375 KEY	Ø 3.125 .750 X .500 KEY

3/4" HEX DRIVE FOR INPUT SHAFT
 PADLOCK: 1/4" SHANK OR SMALLER
 APPROXIMATE TURNS FOR ENGAGEMENT: 11

TORQUE: 140,000 IN LBS [15818 N-M]
 TEMPERATURE: -20° TO 150°F [-29° TO 66°C]
 WEIGHT UNIT: 135 LBS [61.4 KG]
 DRIVER: 67 LBS [30.5 KG]

HOUSING MOUNTING PATTERN				COVER MOUNTING PATTERN				COMMERCIAL GRADE D-LOCK	
MAX	MAX ON CENTER	STD	MIN	MAX	MAX ON CENTER	STD	MIN	DYNATORQUE WWW.DYNATORQUE.COM	DT60 D-LOCK
Ø 11.750 3/4-10	Ø 11.750 3/4-10	Ø 10.000 5/8-11	Ø 6.500 3/4-10	Ø 10.750 Ø .812	Ø 10.750 Ø .812	Ø 10.000 Ø .688	Ø 8.500 Ø .688		